



Variflow[®] HT

High Efficiency Rigid Cell Filters for High Temperature Applications

*Innovative
Clean Air
Solutions*

Variflow HT filters are designed to provide high filtration efficiency in high temperature applications. Three temperature ranges are available (500°F, 750°F and 900°F) to meet the operating requirements of any system.

- High efficiency microglass paper media
- Three efficiencies - 90-95%, 80-85%, 60-65%
- Three temperature ranges - 500°F, 750°F and 900°F
- Completely rigid, metal box design
- Cross braces and faceguards on both sides
- 12" and 6" depths
- 24 gauge aluminized steel cell sides
- High temperature glass wrap sealant
- Single Header construction (standard). Double Header (optional)
- High temperature gasket on air leaving side

Heavy Duty Construction

The cell sides are constructed of aluminized steel, which will not flake off or become brittle at elevated temperatures. Cross braces and expanded metal faceguards on the air entering and leaving sides provide additional support and rigidity. Corrugated aluminum separators with rolled edges maintain proper spacing between pleats at all air flow rates and operating temperatures.

Leak Free Installation

A high temperature gasket on the air leaving side seals the filter in its holding frame and prevents bypass. A high temperature microglass sealant is wrapped around the entire perimeter of the media pack to prevent leakage.



Contains No Silicone

Variflow HT filters contain no silicone, making them ideal for drying ovens on paint booth systems where silicone could cause a contamination problem.

Model Number	Nominal Size (WxHxD)	Rated Air Flow (CFM) @ 500 FPM	Initial Resistance (In. W.G)			Final Resistance (In. W.G)	Media Area (Square Feet)
			90-95%	80-85%	60-65%		
VMB-*04-HT500	24 x 24 x 12	2000	.65	.55	.40	1.20	124
VMB-*13-HT500	20 x 20 x 12	1400	.65	.55	.40	1.20	82
VMB-*03-HT500	12 x 24 x 12	1000	.65	.55	.40	1.20	24
VMB-*04-HT750	24 x 24 x 12	2000	.60	.53	.43	1.20	139
VMB-*13-HT750	20 x 20 x 12	1400	.60	.53	.43	1.20	92
VMB-*03-HT750	12 x 24 x 12	1000	.60	.53	.43	1.20	28
VMB-*04-HT900	24 x 24 x 12	2000	.71	.65	.58	1.20	183
VMB-*13-HT900	20 x 20 x 12	1400	.71	.65	.58	1.20	125
VMB-*03-HT900	12 x 24 x 12	1000	.71	.65	.58	1.20	35





* Filter Efficiency (9 - 90-95%, 8 - 80-85%, 6 - 60-65%)

1. Actual face dimensions are 5/8" less than nominal (24" x 24" is 23-3/8" x 23-3/8"). Actual 12" depth is 11-1/2".
2. Variflow HT should be installed with pleats running vertically.
3. Do not exceed rated face velocity (500 FPM) or final resistance (1.2" W.G.) in high temperature applications.
4. All performance data is based on the ASHRAE 52.1-1992 test method. Performance tolerances conform to section 7.4 of ARI Standard 850-93.

Variflow® HT

High Efficiency Rigid Cell Filters for High Temperature Applications

Operating Data

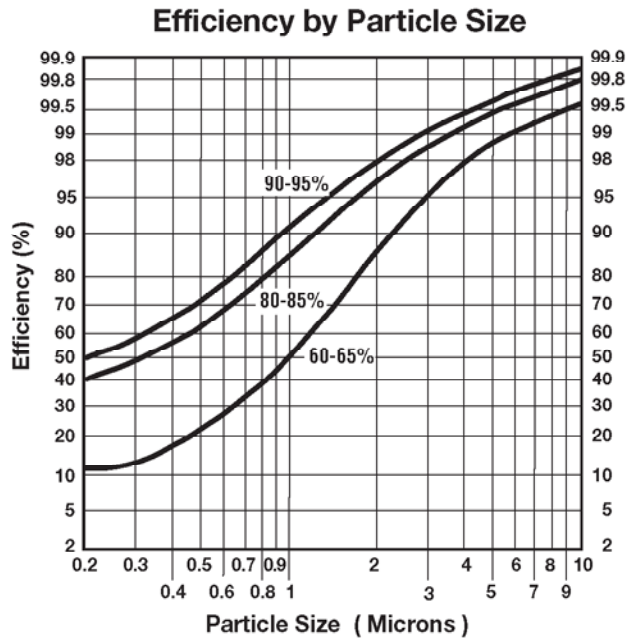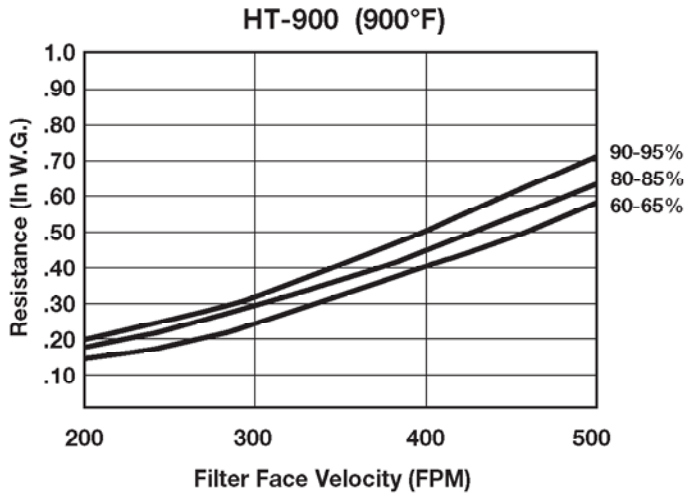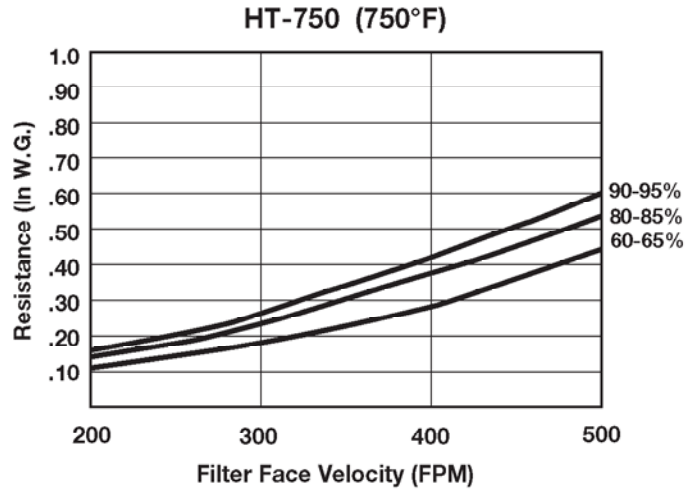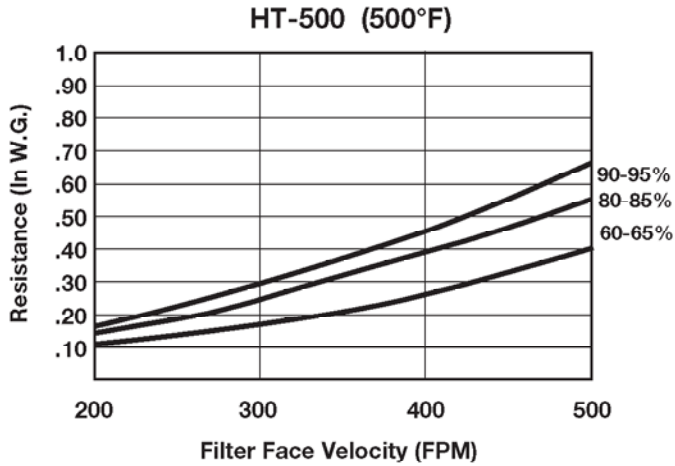

Underwriters Laboratories, Inc. Classification
Variflow HT filters are classified U.L. Class 1.

Operating Temperature Limits (Continuous)
500°F (260°C), 750°F (399°C), or 900°F (482°C)



CLARCOR Air Filtration Products
P.O. Box 32578, Louisville, Kentucky 40232-2578 • 1-800-999-3458 • Fax 502-981-0930
Visit our Web Site - www.airguard.com • E-Mail Address - mailbag@airguard.com
CLARCOR Air Filtration Products has a policy of continuous product research and development and reserves the right to change design and specifications without notice.

Distributed by: